



**Cogan**™ **FASTER.™  
LEANER.  
BETTER.**

# MEZZANINES

easy "QUOTE" form

## AUTHORIZED DEALER

Company ..... Phone .....  
 Contact ..... Fax .....  
 Address ..... Email .....

## FREIGHT ESTIMATE (Cogan will always quote with the most economical solution)

Project name .....  
 Job site address .....

### 1 MEZZANINE SIZE

Length x Width ..... x .....  See sketch

### 2 COLUMN SPACING

Most economical (Cogan to determine)  
 Maximum practical spans (Cogan to determine)  
 See sketch

### 3 LOAD CAPACITY

125 PSF (1,500lbs on a 40"x48" pallet) Light storage  
 135 PSF (75 PSF Live + 60 PSF Dead) Office use  
 150 PSF (2,000lbs on a 40"x48" pallet) Light shelving  
 200 PSF (2,500lbs on a 40"x48" pallet)  
 250 PSF (3,000lbs on a 40"x48" pallet) Heavy storage  
 Special .....

\*\*\* Please inform us of the intended mezzanine use (Pallet Jack use, heavy point or wheel loads, vibrating equipment, etc)

### 4 REQUIRED BUILDING CODES

OSHA Safety standards (minimum required)  
 IBC (International Building Code)  
 NBCC (National Building Code of Canada)  
 OBC (Ontario Building Code)  
 Other .....  
 P.E. Stamped drawings required

\*\*\* The client and/or owner shall be responsible for the building classification on all construction and warrant that all construction shall be governed by the latest edition of the state building code (including any revisions or addendas) and/or with any other applicable code or requirements of all authorities having jurisdiction.

### 5 REQUIRED MEZZANINE HEIGHT

Deck height .....  Clear height .....

### 6 HANDRAIL & KICK PLATE

2 Rails  3 Rails  Wire mesh  
 All sides  1 Side  2 Sides  
 3 Sides  See sketch  None required  
 Approximate length .....

### 7 LOADING GATES

Lift-out  4'-0"  5'-0"  
 Sliding  5'-0"  6'-0"  
 Single swing  2'-6"  3'-0"  
 Double swing  5'-0"  6'-0"  
 Safety pivot gate  
 Width  5'-0"  6'-0"  7'-0"  8'-0"  
 Depth  5'-0"  6'-0"  7'-0"  8'-0"  
 None required

### 8 STAIRCASES & LANDING PLATFORMS

Inside of mezz.  Outside of mezz.  
 Outside with top-landing  None required  
 Straight run  "U" shape  
 "L" shape  
 Closed risers  Galv. diamond grip open tread  
 Special width (max. 48") .....


\*\*\* Staircase stringers are made with formed channels. Standard components includes anti-skid galvanized closed tread and open risers.

### 9 FLOORING

Corrugated steel deck (1 1/2" high)  
 Overlay:  1/2" **resinDEK** the panel of experts  
 LD50, unfinished  With optional gray seal  
 3/4" **resinDEK** the panel of experts  
 LD, unfinished  With optional gray seal  
 MD, gray seal  HD, gray seal  
 Open bar grating  Open steel planking  
 Other .....

### 10 FINISH (POWDER COATED)

Std. gray   Std. blue   
 Std. yellow   Other .....

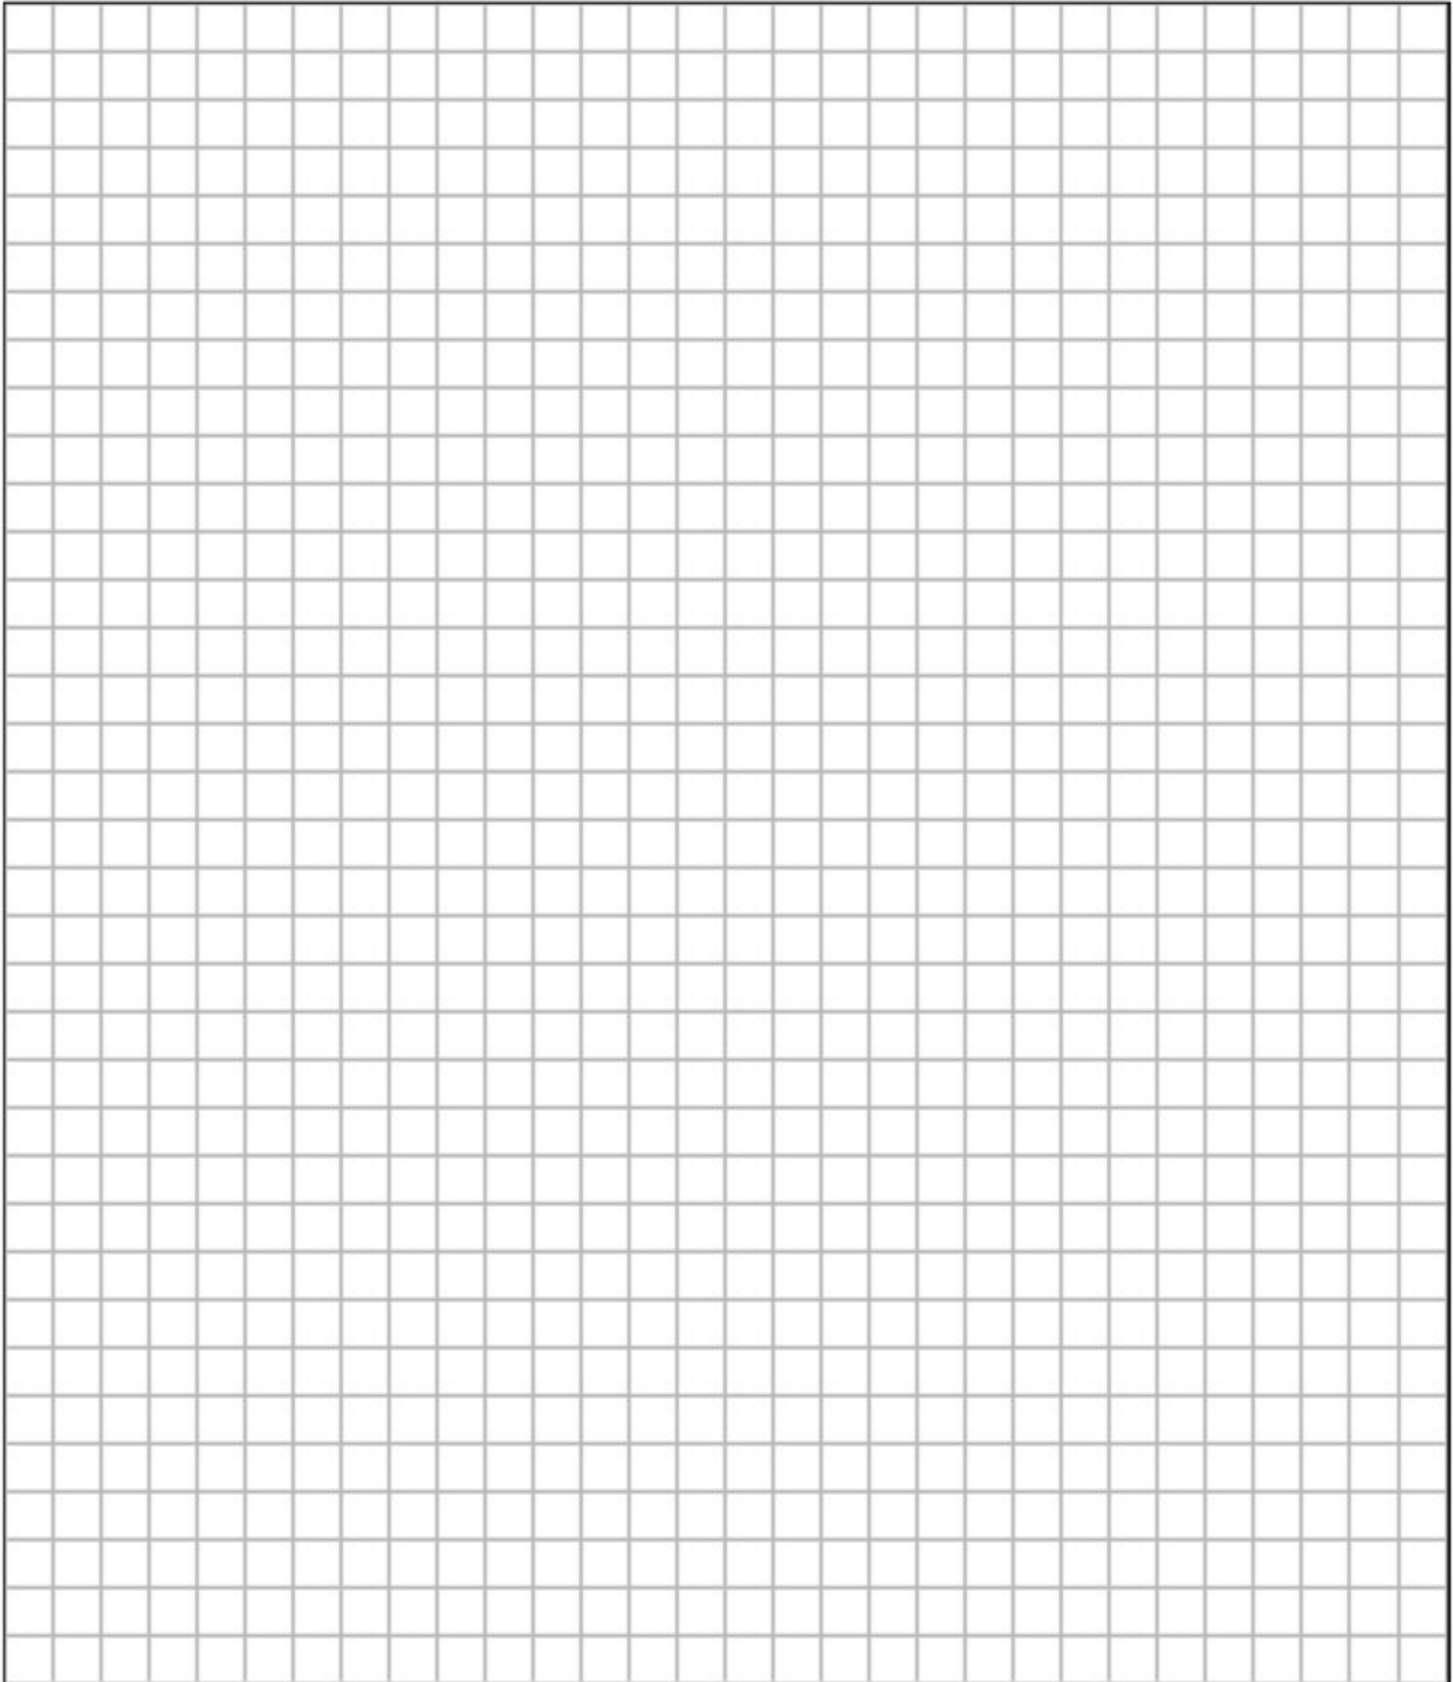

FAX: 1.800.633.3004

[cogan.com](http://cogan.com)

